


Key Fob Instructions

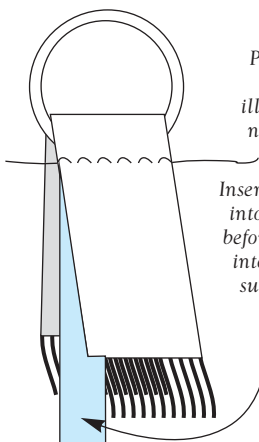

Please note:
key fob
illustration is
not to scale.

Insert your guild label
into the inside seam
before sewing the ring
into position. Make
sure the ring is at
least 1" wider
than the band.

Weave band
1 1/4" wide.

Weave your bands
7" long x 1 1/4" wide.

Leave 2" of unwoven
warp between bands.

After removing from
the loom, secure the
ends from unraveling
by machine-sewing
them at the fell line.

Cut the bands apart
at 9" intervals
allowing for 1" of
fringe on either end.

There is no need to
wash your band when
finished.

Fold your band over
the key ring. Add the
guild label inside the
fold. Machine-stitch to
enclose the key ring,
catching the tail of
the label at the seam.

A fully-warped
inklette loom (2 yards)
may produce 7
finished key fobs.

You can also weave
your band on a
regular loom, just set
the warp a bit denser
than normal.

